

SP Cool Coatings

This cool silicone-polyester paint system utilizes a two-coat system that offers superior quality and durability.



Polar White †

IR .67 SRI 81



Sandstone †

IR .59 SRI 69



Fox Gray †

IR .51 SRI 58



Sagebrush Tan †

IR .51 SRI 59




Brick Red †

IR .38 SRI 40



Aztec Blue †

IR .27 SRI 26

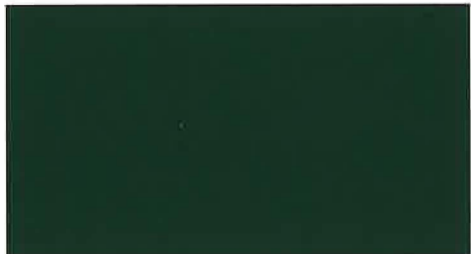


Forest Green †

IR .27 SRI 25



Burnished Slate †

IR .32 SRI 32

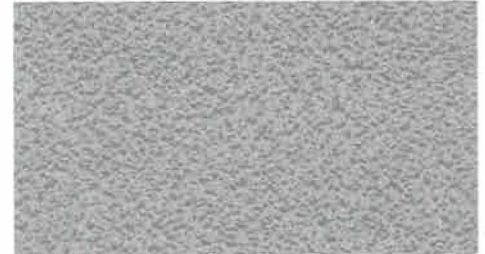

Galvalume *

IR .77 SRI 72



10606 State Route YY
Peculiar, MO 64078

Contact Sales:
(816) 608-8974



**ACCREDITED
BUSINESS**

BBB Rating: A+

[Click for Review](#)

*Non-Stock Color: Extended lead times may apply. *The Galvalume coating process is likely to result in variances in spangle (size, number, and reflection) from coil to coil which may result in noticeable shade variations. Galvalume is also subject to variable weathering and may appear to have different shades due to weathering characteristics. These shade variations are not cause for rejection. † ENERGY STAR® Qualified Color. All SP colors have a 25-year finish warranty. Colors shown closely approximate actual coating colors. These colors utilize Cool Coating Technology.



SP Cool Coatings

Product Specifications

Solar Reflectance, Thermal Emittance and Solar Reflectance Index (SRI)

Solar Reflectance

To be considered “cool,” products must have a Solar Reflectance of at least .25. Solar Reflectance is the fraction of the total solar energy that is reflected away from a surface.

Thermal Emittance

Thermal Emittance is the measure of a panel’s ability to release heat that it has absorbed.

Solar Reflectance Index (SRI)

Put Solar Reflectance and Thermal Emittance together and you get the Solar Reflectance Index (SRI). SRI is calculated by using the values of solar reflectance, thermal emittance and a medium wind coefficient. The higher the SRI value, the lower its surface temperature and consequently, the heat gain into the building. Metal roofs coated with SP Cool Coatings achieve an SRI of 25-81, depending on the color.

Conventional roof surfaces have low reflectance (0.05 to 0.25) and high thermal emittance (typically over .85). Roof panels with both high reflectance and high emittance can reduce the surface temperature by as much as 30-50% based on color and geographic location, which will result in a reduced heat gain to the building, therefore reducing the energy demand.

GALVALUME® is a registered trademark of BIEC International Inc., and some of its licensed producers.

SP COOL PANEL COLORS

SP Cool Color	Initial Solar Reflectance (IR)	Initial Thermal Emittance	Solar Reflectance Index (SRI)
Polar White	.67	0.83	81
Sandstone	.59	0.84	69
Fox Gray	.51	0.85	58
Sagebrush Tan	.51	0.85	59
Brick Red	.38	0.85	40
Aztec Blue	.27	0.85	26
Forest Green	.27	0.83	25
Burnished Slate	.32	0.85	32
Galvalume®	.77	0.08	72

SP COOL TECHNICAL INFORMATION

Test	Test Methods	Performance
Dry Film Thickness	ASTM D1005	0.15 - 0.30 mil primer 0.70 - 0.90 mil topcoat
Gloss	ASTM D523 @ 60°	10 - 80+
Solar Reflectance	ASTM E903, ASTM E1918 Using portable reflectometer	0.25 (25%) min.
Emissivity	ASTM C1371, ASTM E408	0.80 (80%) min.
Pencil Hardness	ASTM D3363	F min.
Flexibility	T-Bend, ASTM D4145	2 T-bend, No pick off
Adhesion	ASTM D3359	1.5 x metal thickness, No adhesion loss
Reverse Impact	ASTM D2794	2 x gauge or 80 lbs.
Abrasion, Falling Sand	ASTM D968	25 - 40 l/mil
Mortar Resistance	ASTM C267	No effect
Detergent Resistance	ASTM D2248 3% detergent @ 100°F (72 hrs.)	No effect
Acid Resistance	ASTM D1308 10% muriatic acid - 15 min. 20% sulfuric acid - 24 hrs.	No effect No effect
Acid Rain Test	Kesternich SO2, DIN 50018	10 cycles min. No objectionable color change
Alkali Resistance	ASTM D1308 10% , 20% NaOH, 1 hr.	No effect
Salt Spray Resistance	ASTM B117 5% salt fog @ 95°F	Passes 1000 hrs.
Humidity Resistance	ASTM D714, ASTM D2247 100% relative humidity @ 95°F	Passes 1000 hrs. No blisters, cracks or peeling
Exterior Exposure	ASTM D2244, ASTM D4214 10 yrs. @ 45°F, South Florida	Max. 5 fade Max. 8 chalk